

Food Dryer Series

For efficient use of non-standard agricultural products and remaining food ingredients!

Original drying program unique to our company is installed as standard & reservation timer

LCD touch panel PRO



Uses a two side blowing method to reduce running costs of electricity by around 15%! (compared to our previous products)

Electric Dryer E-30HD



Petit Mini II plus



E-3H plus



E-7H plus

Using A hairline finished electrolytic zinc-nickel alloy plated steel sheet, giving it a more high-class feel!

Vegetables

Fruit

Teas

Japanese confectioneries

Western confectioneries

Seafood

Other



Use Example

- Radishes, tomatoes, carrots, garlic, ginger, mulukhiya, Japanese mustard spinach, green onions, onions, pumpkin, bitter gourds, burdock root, lotus roots, bamboo shoots, sweet potatoes, shiitake mushrooms, maitake mushrooms, cloud ear mushrooms
- Persimmons (dried persimmons/partially-dried persimmons), apples, grapes, oranges, lemons, figs, blueberries, strawberries, mangoes, pineapples, bananas, pears, papayas, Japanese plums, prunes
- Herbs, turmeric, Angelica keiskei, bamboo, mulberry leaves, olives, yacon
- Rusk, processed foods preserved with honey (glace/peel), thawed chocolate, pectin jelly
- Meat, pregelatinized rice, fish boiled in soy sauce, dried baby sardines with Chinese peppers, pet food, insect dishes (crickets)
- Sweetened beans with sugar, amber sweets, rice crackers, dried rice cakes, thawed frozen food
- Brown seaweed, hijiki seaweed, dried sea lettuce, kelp, sea cucumbers, shrimp, dried fish

*Pictures are for illustration purposes only.

Official Instagram



@_TAIKISANGYO_

Enrich the world by drying of food ~Made in Japan~



TAIKI SANGYO CO., LTD.




Video on Dryer Advantages



Other related Products

Food Crusher *All models feature safety limit switches as standard, and the interior of the crusher is all stainless made.

Large Crusher Sugar Mill



Internal photo

Equipped with inverter control as a standard

<Crushing Example>
Shiitake mushrooms crushing capacity: 10kg (uses screen of φ0.3mm) Average particle size after crushing: 100 mesh (150μm)

Large Crusher Hammer Mill



Internal photo

Inverter control compatible products also available

<Crushing Example>
Shiitake mushrooms crushing capacity: 3kg/h (uses a screen of φ0.3mm) Average particle size after crushing: 100 mesh (150μm)

Medium-size Crusher Speed Mill



Internal photo

With rotation number adjustment function

<Crushing Example>
Shiitake mushrooms crushing capacity: 1.3kg/h Average particle size after crushing (1 minute crushing): 100 mesh (150μm)

Small-size Crusher Mini Speed Mill



Internal photo

Simple structure easy to clean

<Crushing Example>
Shiitake mushrooms crushing capacity: 700g/h Average particle size after crushing (2 minutes crushing): 100 mesh (150μm)

Specification Table

Product Name	Large Crusher Sugar Mill	Large Crusher Hammer Mill	Medium-size Crusher Speed Mill	Small-size Crusher Mini Speed Mill
Model	TS-300	HM-100-S	MS-20	MS-09
Power Source	Three-phase 200V	Single phase 100V	Single phase 100V	Single phase 100V
Power consumption	2.2KW	0.75kW	1.5kW	1.2kW
Crushing capacity	10~20kg/h	5~10kg/h	2~3kg/h	1~2kg/h
External dimensions	1210 × 600 × 750mm	300 × 500 × 540mm	300 × 210 × 440mm	180 × 180 × 290mm
Weight	80kg	25kg	14kg	4.2kg
Feature	6 types (φ 0.3, 0.4, 0.7, 2, 3, 6mm) Screen accessory	6 types (φ 0.3, 0.4, 0.7, 2, 3, 6mm) Screen accessory	Container capacity: 2L	Container capacity: 0.9L

*Note that crushing capacity significantly changes depending on mesh sizes and water density of materials.


Crushing Example(Carrots)



Shiitake Mushroom and Cloud Ear Mushroom Slicer

All stainless steel specification

Shiitake mushrooms can be finished in a shorter period of time if they are sliced and dried.



MRC-100REMS

Specification Table

Product Name	MRC-100REMS
Power Source	Single phase 100V
Power consumption	200W
Maximum processing size	160mm of width × 50mm of thickness
Cutting width	Choose from 6mm or 3.5mm (straight slices)
Processing capacity	180kg/h
External dimensions	315 × 570 × 680mm
Weight	30kg

Vegetable and Fruit Slicer

Best for cut-drying and powdering. Perform different cutting styles by just changing the cutter plates. Choose either of the two cutting blade types (round slices/rectangular slices).



Specification Table

Product Name	Vegetable and Fruit Slicer
Model	T-745E-T VC-4-T
Power Source	Single phase 100V
Power consumption	150/180W 200W
Maximum processing capacity	80 × 150mm 100 × 150mm
Slice type	Choose either round slices or rectangular slices
Cutting width	Round slices 3, 5, 7mm Rectangular slices Diagonal of 2, 3, 4, 5mm (select)
Continued usable time	About 30 minutes No limit
External dimensions	370 × 380 × 480mm 360 × 645 × 465mm
Body weight	7.5kg 29kg

Deaeration Sealer

Best for longer storage periods with deaerated packing, making vacuum packing unnecessary, and keeps the content in the same position.



*1 There is a heating wire located under the sealing device.
*2 Numbers represent a total of two or more sheets, but may change according to voltage and film material.

Specification Table

Product Name	V-301
Power Source	Single phase 100V
Power consumption	1.05kW (using 10mm heater) 0.56W (using 5mm heater)
Vacuum source	Vacuum pump
Deaeration method	Nozzle type
Sealing method *1	One side heating method
Seal length	300mm
Seal width	10mm or 5mm
Heating time	0.1~2.3 sec.
Corresponding film thickness *2	Total less than 0.3mm
Table size	315mm of width × 180mm of depth
External dimensions	400 × 420 × 228mm
Weight	12.3kg

Desktop Sealer

This desktop type allows for holding a bag with both hands. Available in two models with a maximum seal length of 20cm and 30cm.



*1 Heating wire located under the sealing device.
*2 Indicates a total of two or more sheets, but may change according to voltage and film material.

Specification Table

Product Name	FS-215	FS-315
Power Source	Single phase 100V	Single phase 100V
Power consumption	400W (using 5mm heater) 250W (using 2mm heater)	500W (using 5mm heater) 340W (using 2mm heater)
Sealing method *1	One side heating method	One side heating method
Seal length	200mm	300mm
Seal width	5mm or 2mm	5mm or 2mm
Heating time	0.1~1.6 sec.	0.1~1.6 sec.
Corresponding film thickness *2	Total less than 0.2mm	Total less than 0.2mm
Table size	218mm of width × 180mm of depth	317mm of width × 180mm of depth
External dimensions	286 × 376 × 198mm	363 × 376 × 198mm
Weight	5.2kg	5.8kg

Desktop-type Vacuum Packing Machine Various types are available.

Distribution network



TAIKI SANGYO CO., LTD.
<https://www.taikisangyo.co.jp/>

Head Office: 3-3 Seishin-cho, Kita-ku, Okayama-shi, Okayama, 700-0027
TEL. +81-86-252-1178 FAX. +81-86-252-6690

Tohoku Sales Office: 1139-3 Aza-shibazawa, Shimoda, Morioka-shi, Iwate, 028-4134
TEL. +81-19-601-4830 FAX. +81-19-601-4831

Kanto Sales Office: 345 Honzawa, Yoshimi-cho, Hiki-gun, Saitama, 355-0163
TEL. +81-493-53-2788 FAX. +81-493-53-2799

Chubu Sales Office: Garden Court Bereo Kadoma 2101, 18 Aza Higashishimagai, Kadoma, Kisogawa-cho, Ichinomiya-shi, Aichi, 493-0002
TEL. +81-586-82-1028 FAX. +81-586-82-1029

Kyushu Sales Office: 11365-2 Aza-Kirishima, Oaza-Kanoda, Saito-shi, Miyazaki, 881-0104
Eastern Kyushu Sun Green Corporate Park
TEL. +81-983-43-4860 FAX. +81-983-32-0990

Dealer

Diesel Dryer TB Series

Product warranty temperature
Maximum 70°C*2

MADE IN JAPAN

TB-15 S/PRO



AC100V

Processing volume of 60~105kg*1 (15 resin trays)

Diesel

TB-30 F/PRO



AC100V

Processing volume of 120~210kg*1 (30 resin trays)

Diesel

Complete outdoor exhaust

TB-60 F/PRO



AC100V


Processing volume of 240~420kg*1 (60 resin trays)

Diesel

Complete outdoor exhaust


Tray

Petit Mini II Tray




Resin tray

For E/TB



Half Tray

For E/TB

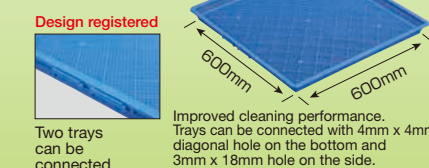


*Can also handle stainless-steel trays

Tray Optional


Teflon Net

Placing a Teflon net on the bottom of the tray prevents dried foods containing a large amount of sugar from sticking to the tray.

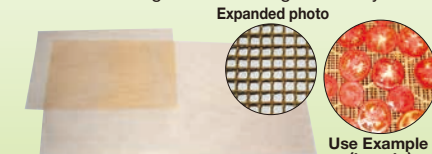

Mesh net

Placing a mesh net of 3x3mm on the bottom of the tray prevents dried foods from dropping through the netting of the tray.

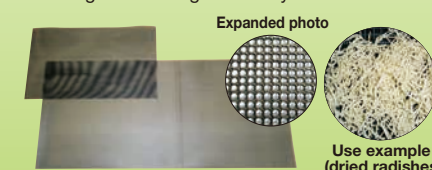

Electric Dryer Optional

Stainless steel cleaning tray

Removes dry products dropped on the bottom of a dryer and captures condensation from dried foods which generate moisture.



Complete outdoor exhaust (For E-7H/20H/30HD)


Completely exhausts wet air from the dryer outdoors.

*With exhaust hood

For E-7H Exhaust hole size of $\phi 165$ (uses flexible aluminum of $\phi 150$)

For E-20H/30HD Exhaust hole size of $\phi 238$ (uses flexible aluminum of $\phi 225$)

*However, you must specify this when ordering the E-7H ceiling exhaust.

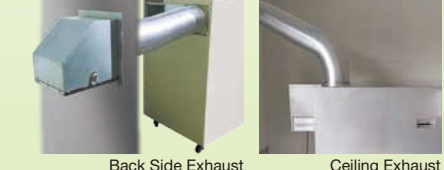

New Release!

LCD touch panels (now applying for patent)

5 features

- 1) Original drying program unique to our company is installed as standard (Can record up to a maximum of 30 patterns)
- 2) Can freely set the temperature, time, airflow, and damper
- 3) Includes reservation timer that can set the time when drying ends
- 4) Intermittent operation functions
- 5) Graph display of set temperature and actual temperature after drying



Customized orders corresponding to your needs

*Customized order handling takes 3 months after receiving the order.

① Customized design corresponding to the purpose of drying with large volume

Recommended for food drying needs with a volume of 1t or more at a time.



Container-type dryer

Flat-type dryer

② Corresponding to a variety of heat sources

Possible to manufacture dryers corresponding to a variety of heat sources.



Gas burner

Electric heater

Steam heater

How to read the model number

(Example) **E - 20 H D -**

E: Electricity
TB: Diesel

Number of Trays

Half Trays


Two Side Blowing Method

S: Timer, auxiliary temperature adjustment
F: 3-tier airflow switch
PRO: LCD touch panel

Complete outdoor exhaust

The wet air that releases from the dryer is completely exhausted outdoors thanks to the TAIKI original exhaust duct. The inside of the room is refreshing thanks to the dry air. What's more, the air that enters the dryer is also fresh, so the dried items come out well, and the dryer does not use that much fuel.

Wet air is exhausted outdoors!

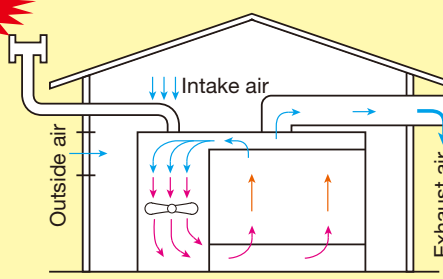

③ Specification changes corresponding to the installation environment



All stainless steel specification

Recommended for drying foods containing salt. To reduce the cost, it is possible to adopt a stainless steel specification only for the inside of a drying room.

Modification by cart

With use of a cart containing 15 trays, a more effective work system can be realized. (Both stainless steel cart and galvanized cart are available.)

④ Change of specifications to further increase drying effectiveness

Side Blowing Type

Changing from a standard lower blowing method to a side blowing method reduces the unevenness of the upper and lower trays.

Can be changed to either standard specifications or cart type remodeling.

*Models handled: TB-30 and TB-60



Food Dryer Specification Table * A separate power transformer is required for use outside of Japan.

Product name	Dimensions (Width x depth x height) mm	Tray	Tray size mm	Power source	Power consumption (50/60Hz) W	Ampere required	Heat source	Nozzle G: Gallon	Air blower	Operation Box (digital display)			Length of power cord	Intake and exhaust of air	Air Blowing Method	Exhaust method	Portable caster	Discharge pipe diameter (mm)	Number of discharge pipes set	Oil tank	Body weight (kg)	Dry processing volume (kg) ^{*1}	Recommend air supply volume (m³/min)
										Airflow adjustment	Automatic temperature rise	LCD panel (Number of Dry Memory)											
Petit Mini II plus	390x440x560	4 Petit MiniII trays	325mm × 325mm 25mm of depth	Single phase 100V	519/517	15A	Electricity	—	Axial flow fan 20W	—	—	—	2.6m	Manual	One Side Blowing	Back side exhaust	○	—	—	—	20	2	—
E-3H plus	665x751x794	3 Half trays	600mm × 600mm 30mm of depth	Single phase 100V	1332/1335	15A	Electricity	—	Sirocco fan 25W	—	—	—	2.1m	Manual	One Side Blowing	Back side exhaust	○	—	—	—	54	6	—
E-7H plus	665x751x1114	7 Half trays	600mm × 600mm 30mm of depth	Three- phase (⊕) or Single phase (⊖) 200V	2358/2333	20A	Electricity	—	Sirocco fan 50W	—	—	—	2.1m	Manual	One Side Blowing	Ceiling exhaust Back side exhaust *Specify when ordering	○	—	—	—	74	14	—
E-7H Premium				76																			
E-20H-S	871x1274x1450	20 Half trays	600mm × 600mm 30mm of depth	Three-phase 200V	6755/6803	30A	Electricity	—	Sirocco fan 200W	—	—	—	None	Manual AUTO	One Side Blowing	Ceiling exhaust Back side exhaust	○	—	—	—	187	40~70	10
E-20H-PRO					6868					○	○	○ (30 patterns)									192		
E-30HD-S	870x1302x1700	30 Half trays	600mm × 600mm 30mm of depth	Three-phase 200V	8765/8885	40A	Electricity	—	Sirocco fan 300W	—	—	—	None	Manual AUTO	Two Side Blowing	Ceiling exhaust Back side exhaust	○	—	—	—	231	60~105	15
E-30HD-S Premium					—					—	—	235											
E-30HD-PRO					○					○	○ (30 patterns)	237											
E-30HD-PRO Premium					—					—	—	241											
E-60H-S	1988x1283x2103	60 Half trays	600mm × 600mm 30mm of depth	Three-phase 200V	18595/18835	75A	Electricity	—	Sirocco fan 300W x 2	—	—	—	None	Manual AUTO	One Side Blowing	Outdoor exhaust	○	—	—	—	542	120~210	30
E-60H-PRO					18900					○	○	○ (30 patterns)									547		
E-120H-S	3672x1278x2309	120 Half trays	600mm × 600mm 30mm of depth	Three-phase 200V	37040	150A	Electricity	—	Duct fan 750W	—	—	—	None	Manual AUTO	One Side Blowing	Outdoor exhaust	○	—	—	—	1095	240~420	60
E-120H-PRO					37105					○	○	○ (30 patterns)									1100		
TB-15-S	901x1802x1998	15 resin trays	600mm × 1200mm 30mm of depth	Single phase 100V	264/296	15A	Diesel	1.35	Voltage ventilation fan 40cm 100W	—	—	—	3.8m	Manual AUTO	Lower Blowing	Ceiling exhaust	—	φ120	2 straight cylinders, 1 half-straight cylinder, 2 curved cylinders, 1 P-top	90L	228	60~105	15
TB-15-PRO	901x1802x2198				334/366					—	○	○ (30 patterns)									234		
TB-30-F	1983x1488x2346	30 resin trays	600mm × 1200mm 30mm of depth	Single phase 100V	670/835	15A	Diesel	1.35	Voltage ventilation fan 50cm 750W	○	—	—	3.8m	Manual AUTO	Lower Blowing	Outdoor exhaust	—	φ150	3 straight cylinders, 1 half-straight cylinder, 2 curved cylinders, 1 P-top	90L	654	120~210	30
TB-30-PRO					740/905					○	○	○ (30 patterns)									660		
TB-60-F	3437x1488x2346	60 resin trays	600mm × 1200mm 30mm of depth	Single phase 100V	1005/1118	15A	Diesel	2.0	Voltage ventilation fan 50cm 750W	○	—	—	3.8m	Manual AUTO	Lower Blowing	Outdoor exhaust	—	φ150	3 straight cylinders, 1 half-straight cylinder, 2 curved cylinders, 1 P-top	90L	934	240~420	60
TB-60-PRO					1075/1188					○	○	○ (30 patterns)									940		